


## Configuration Data



MODELS	
CO	"CO" Constant pump with stroke speed (frequency) adjustment
CL	"CL" Constant pump with level control, stroke speed (frequency) adjustment

CAPACITIES			
2001	1 l/h against 20 bar	0.26 GPH against 290 PSI	Tubing: 4x6
1804	4 l/h against 18 bar	1.05 GPH against 261 PSI	Tubing: 4x6
1802	2 l/h against 18 bar	0.52 GPH against 261 PSI	Tubing: 4x6
1505	5 l/h against 15 bar	1.32 GPH against 218 PSI	Tubing: 4x6
1504	4 l/h against 15 bar	1.05 GPH against 218 PSI	Tubing: 4x6
1502	2 l/h against 15 bar	0.52 GPH against 218 PSI	Tubing: 4x6
1010	10 l/h against 10 bar	2.64 GPH against 145 PSI	Tubing: 4x6
1005	5 l/h against 10 bar	1.32 GPH against 145 PSI	Tubing: 4x6
1004	4 l/h against 10 bar	1.05 GPH against 145 PSI	Tubing: 4x6
0512	12 l/h against 5 bar	3.17 GPH against 72 PSI	Tubing: 4x6
0510	10 l/h against 5 bar	2.64 GPH against 72 PSI	Tubing: 4x6
0408	8 l/h against 4 bar	2.11 GPH against 58 PSI	Tubing: 4x6
0310	10 l/h against 3 bar	2.64 GPH against 43 PSI	Tubing: 4x6
0116	16 l/h against 1 bar	4.22 GPH against 14 PSI	Tubing: 4x6

POWER SUPPLY	
00	230 VAC Schuko plug
0S	230 VAC Australian plug
01	230 VAC without plug
03	115 VAC US plug
04	24 VAC without plug
05	12 VDC *
07	24 VDC


\* Confirm capacity availability at 12 VDC with EMEC staff.

Model V **CO** **2001** **4** **00** **00**

LIQUID ENDS								
	Head	Orings	Valve		Diaphragm	Tubing		Viscosity
			Body	Balls		Delivery	Suction	Max CPS
1	PVDF	Viton®	PVDF	Ceramic	PTFE	PVDF	PVDF	100
2	PVDF	EPDM	PVDF	Ceramic	PTFE	PVDF	PVDF	100
4 *	PVDF	Viton®	PVDF	Ceramic	PTFE	PVDF	PVDF	100
5 *	PVDF	EPDM	PVDF	Ceramic	PTFE	PVDF	PVDF	100

Viton® is a registered trademark of DuPont Dow Elastomers.  
 \* Use this code for capacities up to 1 l/h.

SPECIFICATIONS				
	Strokes per Minute		Average Input Power at max speed	Shipping weight
	Min	Max		
2001	18	180	16 Watt	2.2 Kg (4.85 Lbs)
1804	18	180	22 Watt	
1802	18	180	16 Watt	
1505	18	180	22 Watt	
1504	18	180	16 Watt	
1502	18	180	16 Watt	
1010	18	180	22 Watt	
1005	18	180	16 Watt	
1004	18	180	16 Watt	
0512	18	180	22 Watt	
0510	18	180	16 Watt	
0408	18	180	16 Watt	
0310	18	180	16 Watt	
0116	18	180	16 Watt	

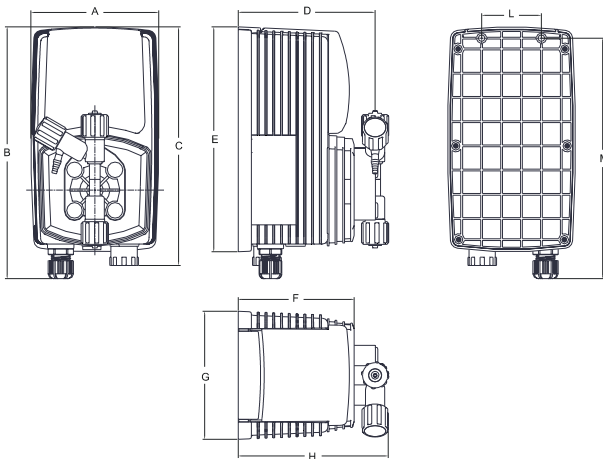

DIMENSIONS		
	mm	inch
A	106.96	4.21
B	210.44	8.28
C	199.44	7.85
D	114.50	4.50
E	187.96	7.40
F	97.00	3.81
G	106.96	4.21
H	125.47	4.93
L	50.00	1.96
M	201.00	7.91

### IP65 enclosure (NEMA4x)

The series "V" dosing pumps are manufactured in moulded glass filled Polypropylene housing to ensure protection against aggressive chemicals and tough environment.

OUTPUT INFORMATION								
	Liters per Hour		Gallons per Hour		mL/cc per Stroke		Maximum Injection Pressure	
	Min	Max	Min	Max	Min	Max		
2001	0.03	1	0.007	0.26	0.027	0.09	20 bar	290 PSI
1804	0.12	4	0.031	1.05	0.111	0.37	18 bar	261 PSI
1802	0.06	2	0.015	0.52	0.057	0.19	18 bar	261 PSI
1505	0.15	5	0.039	1.32	0.138	0.46	15 bar	218 PSI
1504	0.12	4	0.031	1.05	0.111	0.37	15 bar	218 PSI
1502	0.06	2	0.015	0.52	0.057	0.19	15 bar	218 PSI
1010	0.3	10	0.079	2.64	0.279	0.93	10 bar	145 PSI
1005	0.15	5	0.039	1.32	0.138	0.46	10 bar	145 PSI
1004	0.12	4	0.031	1.05	0.111	0.37	10 bar	145 PSI
0512	0.36	12	0.095	3.17	0.333	1.11	5 bar	72 PSI
0510	0.3	10	0.079	2.64	0.279	0.93	5 bar	72 PSI
0408	0.24	8	0.063	2.11	0.222	0.74	4 bar	58 PSI
0310	0.3	10	0.079	2.64	0.279	0.93	3 bar	43 PSI
0116	0.48	16	0.126	4.22	0.444	1.48	1 bar	14 PSI